


/

\*

1.

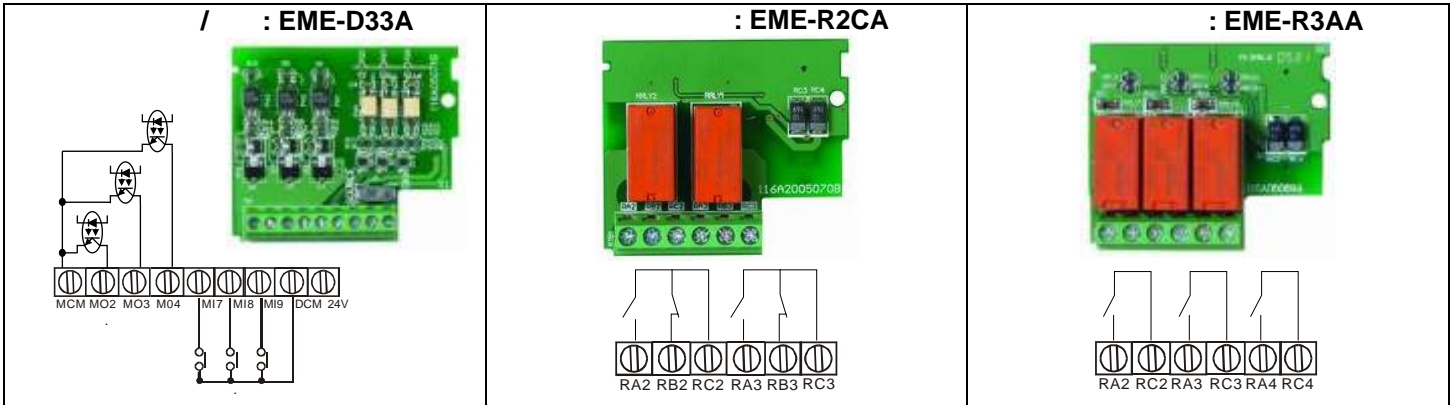

2.

\*

( - )

\*

\*

\*

EME-D33A: 2 \*

EME-R2CA/EME-R3AA: 5 \*

\*

EME-D33A: 16~24 AWG (0.2 - 1.3 2)

EME-R2CA/EME-R3AA: 12~24 AWG (0.2 - 3.3 2)

\*



\*

11. 5

\*

3.

: -10 °C ... 40°C ( ).

: 90%RH ( ).

:

• 1000 .

• , .

: 9.80665 / <sup>2</sup>(1G) 20 5.88 / <sup>2</sup>(0.6G) 20 50 .

/ :

\*

• EME-D33A: MI7~MI9: : 16 .

\*

: 10

\*

MO2~MO4: 48 , 50 .

\*

• EME-R2CA: : A. : 5A(N.O.)/3A(N.C.) 240VAC, 5A(N.O.)/3A(N.C.) 24VDC

\*

B. : 1.5A(N.O.)/0.5A(N.C.) 240VAC, 1.5A(N.O.)/0.5A(N.C.) 24VDC.

\*

• EME-R3AA: : . 250VAC/6A

4.

RC- , ( )

.( )

( , .)

15 .

VFD-E.